



SWG100 BIOGAS

For optimizing production, performance, and reporting

Up to 10 sites monitoring via. time sharing

O₂ | CO₂ | CH₄ | H₂S | H₂ | CO



SWG100 BIOGAS

Measuring CH₄, CO₂, H₂S (high & low ranges), H₂, CO and calculated caloric values

- Industry compatible rugged design for harsh industrial use
- Up to 10 sites monitoring via. time sharing
- Efficient gas prep provides fast and reliable measurement
- Fresh air and auto zero
- Auto calibration
- Sampling flow from low suction up to high pressure gas
- Direct and continuous / discontinuous measurement
- Optional, dilution of the H₂S sample gas
- Multiple in / outputs: Ethernet, RS485 Modbus / Profibus / 4 ... 20 mA / Alarm relays
- Fast & Easy installation and start-up / no need for compressed air for dilution

THE IDEAL SOLUTION FOR ...

- **Landfill sites**
- **Anaerobic digesters**
- **CHP/WTE cogeneration engines**
- **Municipal or industrial wastewater treatment plants**
- **Flare inlets / outlets**
- **RNG production**
- **Food or animal waste process plants**
- **Coal bed methane sites**



Gas cooler
Peltier type

Sample gas
outlet

Gas pump

Condensate
pump
Internal flow
monitoring


Calibration gas
port

Fresh air inlet
port

Condensate
outlet port

Cabinet heater

Monitored
ventilation with
alarm

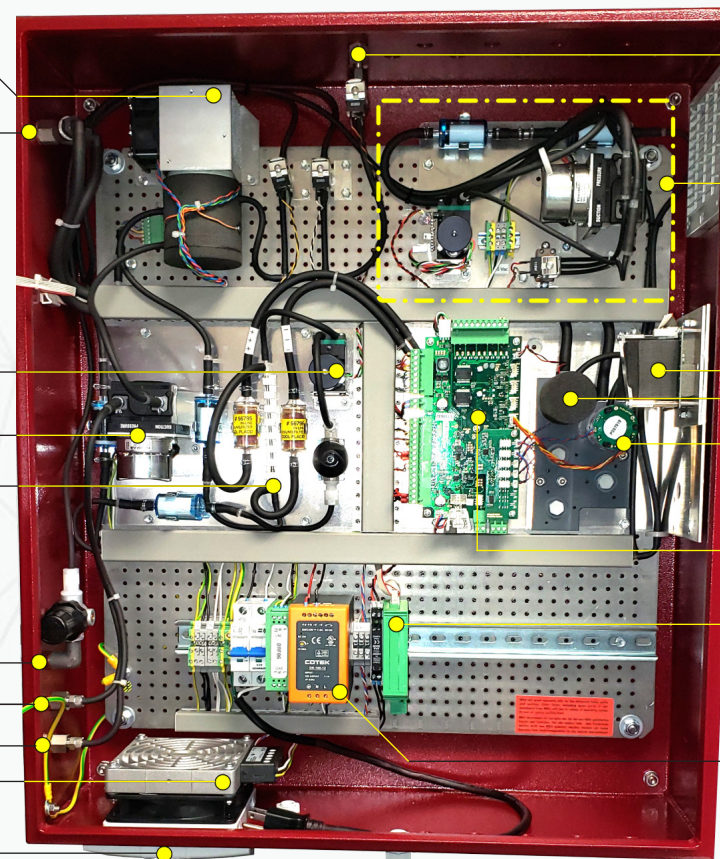

Up to 10 switching
biogas inlets
(time sharing)
with fail-safe
shut of solenoid
valve and flow
restrictor orifice

50:1 dilution
system for H₂S
allowing up to
100,000 ppm
H₂S

NDIR module
for CO₂ & CH₄
measurement

Electro-chemical
sensors
O₂/H₂S high and
low/H₂/CO

Combustible gas
detector (% LEL)

iO - 4 ... 20 mA
Alarm relays
Ethernet

Universal power
supply 90-240 Vac
47-63 Hz / 90 W

Sample gas inlet
port(s)

Sample gas
outlet

3.5" color
display
Key pad


Cabinet locks

Calibration gas
port

Fresh air inlet
port

Condensate
outlet port

Monitored ventilation
with alarm

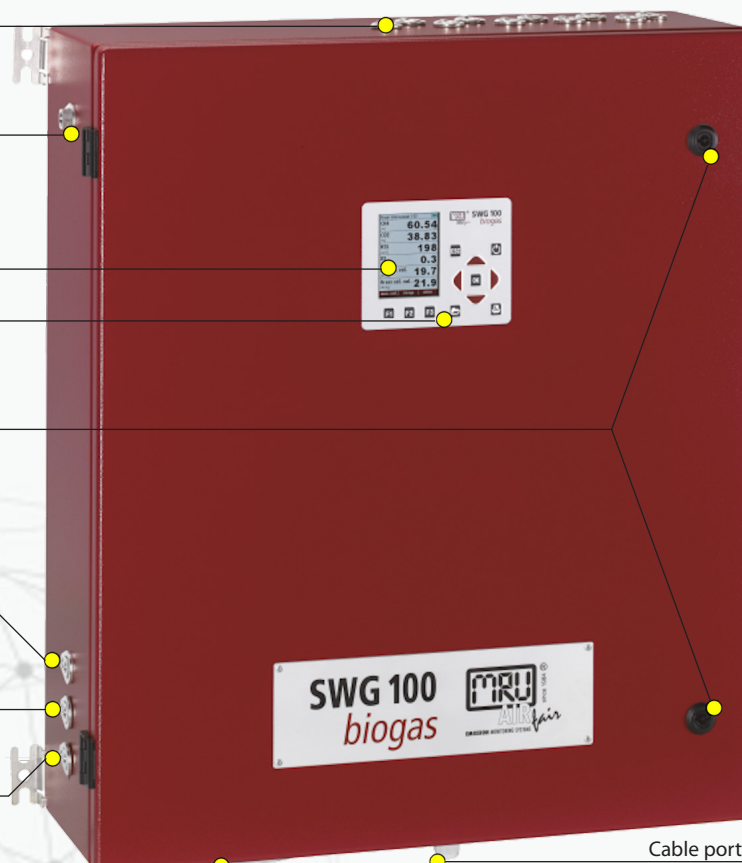

Cable ports

SWG 100 BIOGAS

TECHNICAL SPECIFICATIONS

Measured components	Measuring method	Measuring range	Resolution	Accuracy
Methane CH ₄	infrared	0 ... 100%	0.1 Vol%	± 0.3 Vol% / 3 % of reading**
Carbon dioxide CO ₂	infrared	0 ... 100%	0.01 Vol%	± 0.3 Vol% / 3 % of reading**
Oxygen O ₂	ec, continuously	0 ... 25%	0.01 Vol%	0.2 % abs.
Hydrogen sulfide H ₂ S	ec, discontinuously	0 – 2.000/4.000 ppm*	1 ppm	± 10 ppm / 10 % of reading**
Hydrogen sulfide H ₂ S low	ec, discontinuously	0 – 200/1.000 ppm*	1 ppm	± 5 ppm / 10 % of reading**
Hydrogen H ₂	ec, discontinuously	0 – 1.000/2.000 ppm*	1 ppm	± 10 ppm / 10 % of reading**
Carbon monoxide CO	ec, discontinuously	0 – 10.000/20.000 ppm*	1 ppm	± 10 ppm / 3 % of reading**

H₂S dilution systems 50:1

for landfills and other high H₂S applications, not only has the range been extended, but additionally, high resiliency sensors can be used providing better accuracy and stability, especially in difficult applications such as landfills, dairy digesters, etc.

Calculated component	Calorific value: 0 – 50 MJ/m ³ ; MJ/kg
HMI human machine interface	3.5" TFT color display Backlit keyboard, password protected operation 4x analog output 4-20 mA, floating, max. load 500R 2 alarm relays, potential free contacts 24 Vdc/5 A RS485 digital interface (Modbus RTU) DIN-rail RS485 / Profibus converter
System safety components	Monitored cabinet ventilation fan with alarm Stainless steel flow restrictor orifice Sample gas shut-down solenoid valve LEL (CH ₄) monitoring inside cabinet (option)
Sample preparation	Stainless steel gas fittings with 1/8" ID threads Electric gas cooler (Peltier type) (option) Teflon particulate filter, internal Viton hosing Sampling biogas with condensate of max. 14ml/min Monitored and regulated sample flow 40...60 l/h Sample inlet pressure: -40 inH ₂ O to +80 inH ₂ O (-100 mbar to +200 mbar) Sample venting: atmosphere pressure
Cabinet dimensions	Aluminum with anti-corrosive structural painting 27.55" x 23.61" x 8.26" (700 x 600 x 210 mm) (H x W x D) for wall or rack mounting
Weight / Protection	55lbs (25kg) / IP54
Ambient temperature	41°F ... 113°F (+5°C...+45°C) or 14°F ... 113°F (-10°C...+45°C) with cabinet heater
Installation site	Indoor or outdoor (rain and sun shade is mandatory user scope of supply)
Cabinet conditioning	Continuous, monitored fan ventilation Cabinet heater 200 W (option)
Power supply	Universal 90 - 240 Vac / 47 - 63 Hz / 90 W (300 W with cabinet heater)

Data subject to change without notice * overload for short-term measurements only ** the higher value applies



MRU Instruments, Inc.

Humble, TEXAS 77338 USA

Tel.: +1 (832) 230-0155

Info@mru-instruments.com

www.mru-instruments.com

MRU Representative: